Blue Hills Construction

The Hazlet

RTM #2641

1604 Sq. Ft. | 3 Beds | 2 Baths

502 1st Ave N
Maple Creek, SK
306-206-0836
bluehillsconstruction.ca


Build With Us!

bluehillsconstruction.ca



Quick Facts

- 1604 sq. ft
- 56' X 29'
- 3 Beds
- 2 Baths
- Vaulted Shed Dormer
- 6' Front Deck

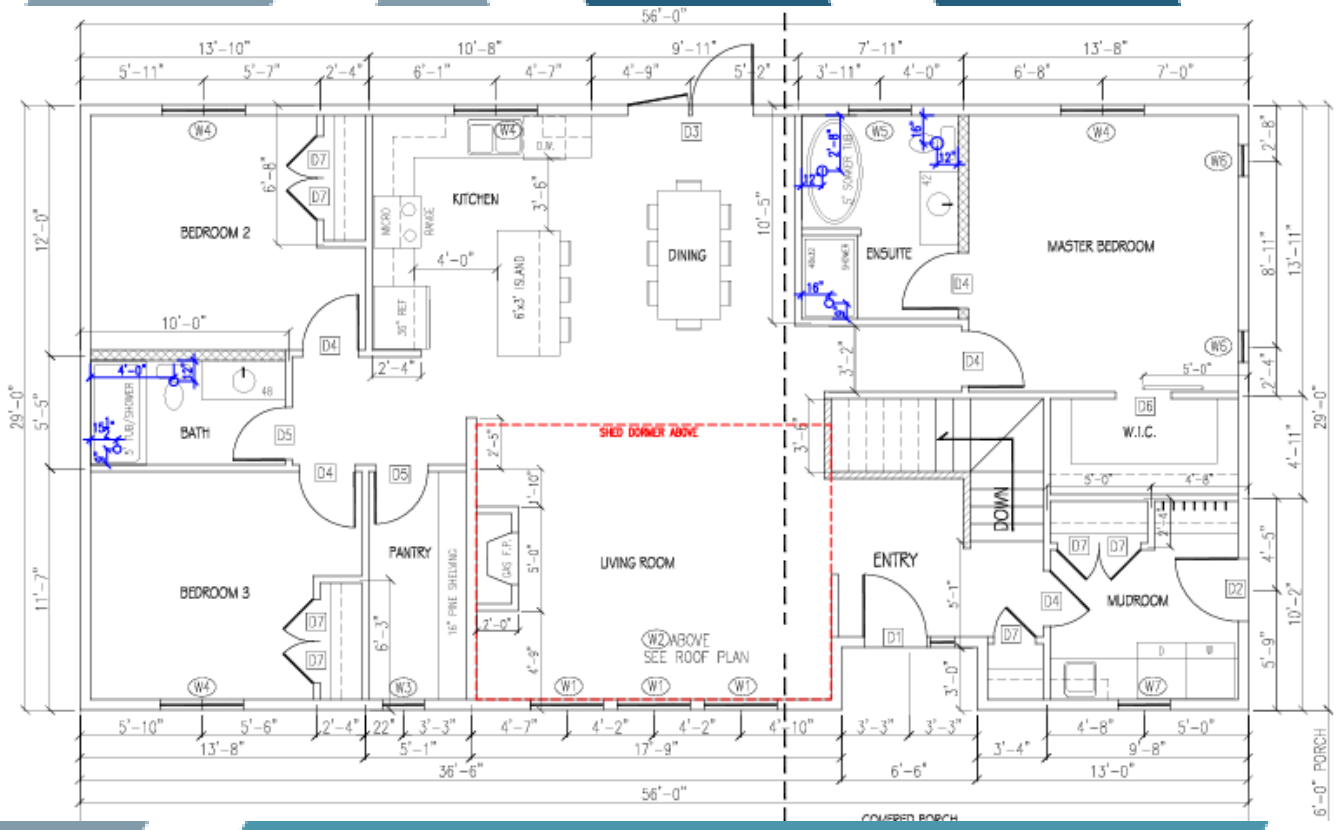

Conceptual floor plan. Dimensions, finishes, specifications, pricing, and availability are subject to change. Images may show optional upgrades.

Blue Hills Construction

The Hazlet

RTM # 2641

1604 Sq. Ft. | 3 Beds | 2 Baths

502 1st Ave N
Maple Creek, SK
306-206-0836
bluehillsconstruction.ca

Build With Us!

Specifications

Superior Construction

- Engineered Floor System
- 3/4" T&G AdvanTech Floor Sheathing
- 7/16” Sheathing on Roof and Exterior Walls
- R-24 Insulation in Exterior Walls, R-60 Cellulose in Ceilings
- 6 mil Poly Vapor Barrier
- Engineered Roof Trusses @ 24" O.C.
- 2x6 Exterior Walls
- 2x4 Interior Walls

Custom Kitchen

- Custom Cabinets w/ Adjustable Shelving
- Crown Molding on Cabinets
- Soft Close Doors and Drawers
- Undermount or Farmhouse Sink
- Single Lever Pull Out Faucet w/ Veggie Sprayer
- Quartz Counter Top with Tiled Backsplash
- Drawers in Lower Cabinets Where Possible
- Custom Rangehood
- Kitchen Island

Interior

- 5mm Glue-Down Luxury Vinyl Plank Flooring
- 1/2" Primed and Painted Drywall with Chamfered Corners
- Shed Dormer in Living Room
- Adjustable Wire Shelving in bedroom closets
- White Standard Height MDF Interior Doors
- White MDF 3” Flatstock casings, and 4” Flatstock Baseboards
- Lever Style Door Handles
- 8' Flat Ceilings

Exterior

- Full Exterior House Wrap
- Insulated Gentek ALIGN Horizontal Siding
- Wood Accent Posts for Deck
- 24" Vented Soffit
- Snap-Lok Metal Roof
- 6" Metal Fascia
- 36" Decorative Insulated Entry Doors
- Weiser Keyed Alike Deadbolts
- Black Exterior/ White Interior Triple Pane PVC with Dual Low E and Argon Gas
- 6' Front Covered Deck

Electrical

- 200-AMP Breaker Panel with Conduit
- Pot Lights Throughout
- Stock Light Fixtures
- Under-Cabinet Lighting in kitchen
- GFCI Circuits, where required
- Smoke/Carbon Monoxide Detectors as per Code
- Standard Plugs/Switches as per Code (Square Decora)
- TV Outlet with Conduit
- Soffit plug for Christmas Lights

Plumbing

- Free-standing Bathtub in Ensuite
- One- Piece Acrylic Shower Unit in Ensuite
- One-Piece Acrylic Tub/Shower Unit in Main Bath
- Comfort Height Toilets
- Pre-Finished Vanities with Quartz Countertops
- Laundry Sink in Mudroom
- Stock Tap and Shower Fixtures
- All waste lines stubbed into Floor Joist Cavity
- PEX Waterlines dropped into Floor Joist Cavity
- Wire and HRV Ducts installed to Floor Joist Cavity
- Bath Fans in Washrooms